



SECURITY DOOR CONTROLS ■ WWW.SDCSECURITY.COM
 801 Avenida Acaso, Camarillo, CA 93012
 [t] 800.413.8783 ■ 805.494.0622 ■ E-mail: service@sdsecurity.com

TEMPLATE-S6203

Devices covered by this template:
Panic / Fire SVR Exit Device with 03 Nightlatch Trim.

THIS SIDE UP FOR LHR DOOR

PLACE THIS SIDE ON FRAME STOP

FRAME STOP

THIS SIDE UP FOR RHR DOOR

FOLD HERE

CAUTION
 DO NOT USE DOOR EDGE

PLACE THIS SIDE ON DOOR

DOOR

(4x) DEVICE MOUNTING HOLES


TRIM: DRILL 5/16" CLEARANCE HOLES ON PUSH SIDE,
 15/32" HOLES ON PULL SIDE.

(2x) END CAP BRACKET HOLES

METAL: DRILL / TAP FOR 1/4"-20
 MACHINE SCREWS.

WOOD: PRE-DRILL 1/8" HOLES.

SEXBOLTS: DRILL 5/16" CLEARANCE
 HOLES ON PUSH SIDE, 3/8" ON
 PULL SIDE.

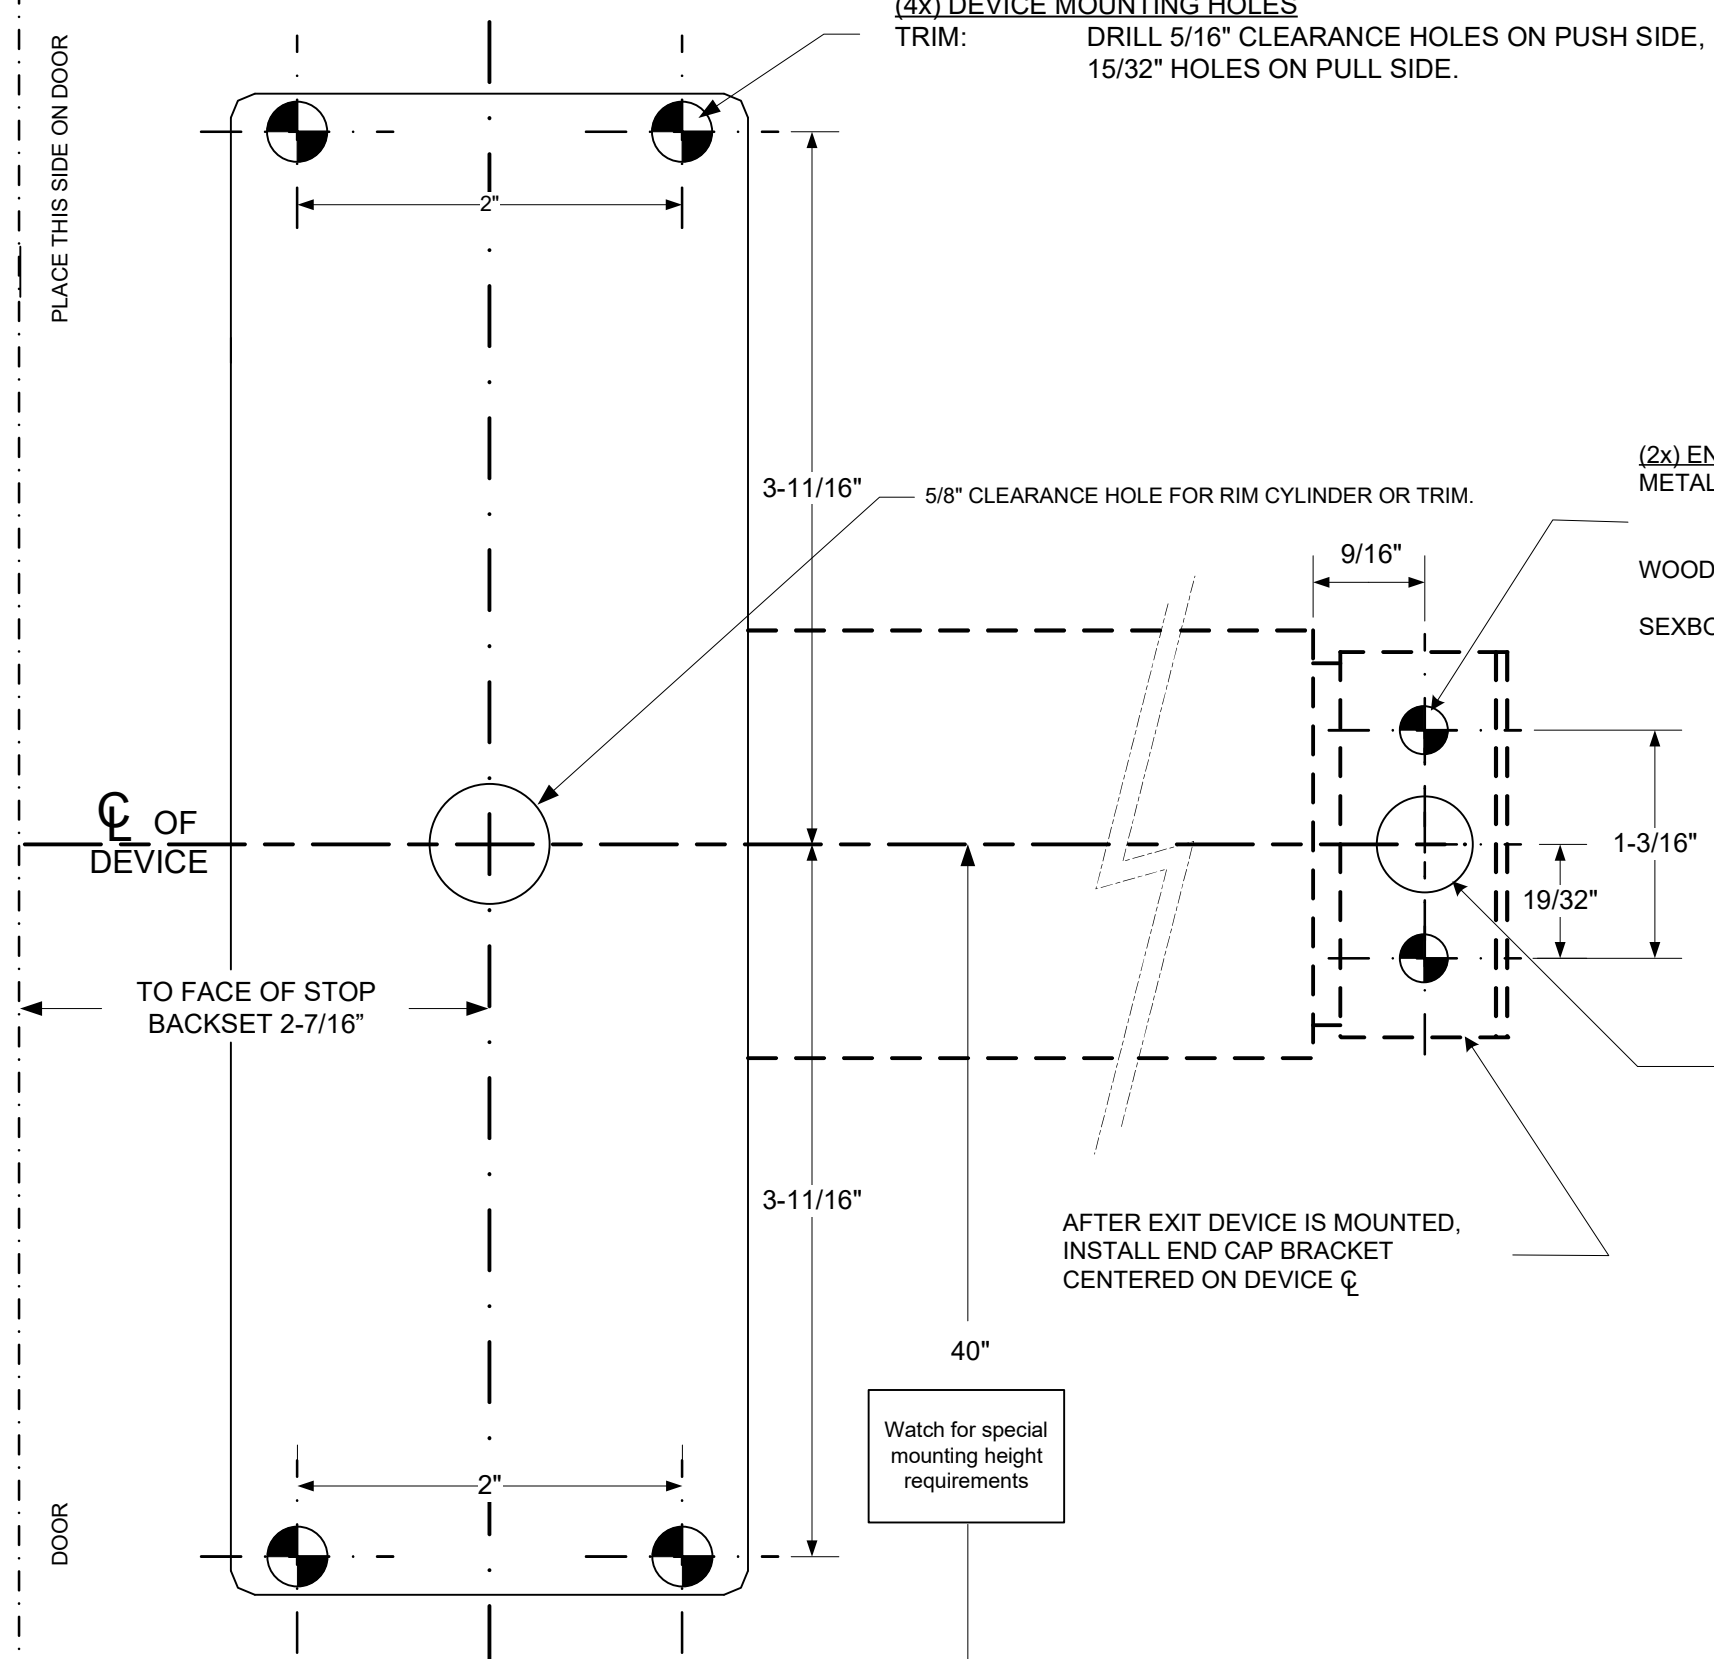

AFTER EXIT DEVICE IS MOUNTED,
 INSTALL END CAP BRACKET
 CENTERED ON DEVICE CL

Watch for special
 mounting height
 requirements

FINISHED FLOOR



TEMP-EK03 & GK03 03 NIGHTLATCH TRIM

